


SMALL CHANGE.

BIG IMPACT.

Convert biohazardous waste into sterile confetti-like trash in one self-contained device.

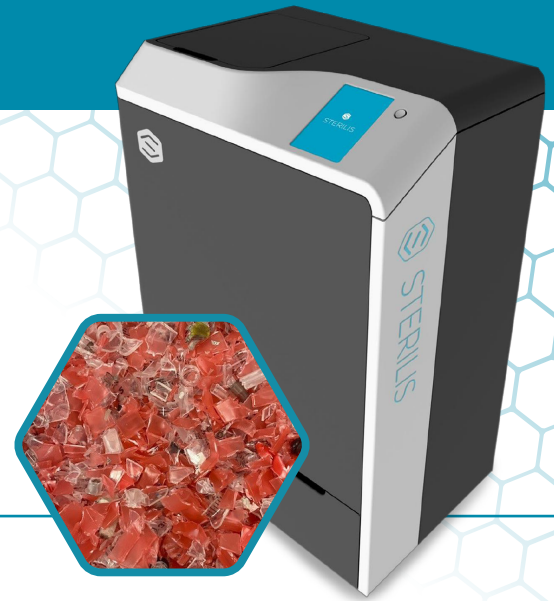

Sustainability, safety and savings – all-in-one solution.

Gain control over your biohazardous waste. The Sterilis Solutions Remediator can help you:

- Reduce operating costs by up to 50%
- Dramatically reduce your toxic air pollution and carbon emissions
- Eliminate improper disposal liability
- Enhance regulatory compliance
- Increase safety
- Reduce/eliminate third-party dependency

Types of biohazardous waste that can be processed

SHARPS CONTAINERS

Syringes, Needles, Lancets, Plastic Handle Scalpels, Suture Removal Kits, Auto-Injecting Pens



RED BAG WASTE

IV Tubing, Bandages, Gloves, Drapes and Absorbent Materials, Small Filter and Liquid Cartridges



FROM HAZARDOUS TO HARMLESS



CYCLE TIME	60 to 90 minutes depending on the type of waste load and pre-heat condition of the system
VESSEL WASTE CAPACITY	5 Gallon (19 liters)
DIMENSIONS	36" W x 26" D x 49" H (914 mm W x 661 mm D x 1244.6 mm H)
VOLTAGE AND CURRENT	USA 220V ± 10%, Single Phase, 60 Hz, 15A Europe 230V ± 10%, Single Phase, 50 Hz, 15A
CLEARANCE ZONE	18" (45 cm) on the left, 10" (25 cm) to the rear, 12" (30 cm) to the right and 36" (91 cm) above 36" (91 cm) in front of the system
OPERATING CONDITIONS	Relative Humidity: 20-50% Temperature Operating Range: Min 68° F (20° C)/ Max 76° F (25° C) Max Elevation: 10,000' (3000 m)
ROOM REQUIREMENTS	Minimum size room: 8' (2.5 m) x 8' (2.5 m) Ventilation providing >= 10 air changes / hour (or 83 CFM of air flow, outside air preferred)
MACHINE MOBILITY	If relocation is necessary, the Remediator must be packed accordingly and moved by trained personnel (moving within the facility is an exception)
MACHINE WEIGHT	936 lbs. (425 kg)
SHIP WEIGHT	~1095 lbs. (~497 kg)
MANUFACTURED	United States
SURGE PROTECTION	The Remediator is manufactured with surge protection sufficient for use with domestic U.S. power sources

FLUID SYSTEM	Distilled water only, approximately 350 ml - 3 gallon (11.5 liter) reservoir
INTERNET ACCESS	CAT-5 Ethernet or WiFi
STERILIZATION PARAMETERS	Steam Temperature: 277 °F (136 °C) Steam Pressure: 47psia
STERILIZATION PROCESS	High Pressure Steam, 350 ml of water consumed per cycle.
PROCESSED PARTICLE SIZE	Particulate size typically less than 0.5" x 0.5" (12.7 mm X 12.7 mm)
MEDICAL WASTE THAT CAN BE PROCESSED	Sharps Containers: Syringes, Needles, Plastic Handle Scalpels, Suture Removal Kits, Red Bag Waste: IV Tubing, Bandages, Gloves, Drapes and Absorbent Materials, Small Filter and Liquid Cartridges
MEDICAL WASTE THAT CANNOT BE PROCESSED	Non-Regulated Medical Waste Pharmaceuticals. Any volatile material, Surgical Tools (drill bits, abrasion tools) Chemotherapy Waste, Body Parts
CALIBRATION	Calibration is recommended on a 12-month cycle by Sterilis Solutions or a trained and authorized service provider
WARRANTY LENGTH	One-year parts and labor
UL APPROVED	UL 61010
PREVENTIVE MAINTENANCE	6 calendar months

Ready to make an impact and **convert hazardous to harmless** in about **60 minutes?**

Call (508) 875-1070



- Easy-to-use: log in, load & press "Start"
- Cloud-based recording of compliance data
- Prompts/records bio challenges
- 60-minute cycle on average
- No plumbing needed
- Portable, self-contained system
- 36" W x 26" D x 49" H; available in 220V model



©2022 Sterilis Solutions, LLC Proprietary & Confidential



LOCATIONS

85 Swanson Road Suite 315
Boxborough, MA 01719

351 W Hubbard St Suite 610
Chicago, IL 60654

CALL US TODAY AT
(508) 875-1070